

Supporting Information

Anode Properties of $\text{Cr}_x\text{V}_{1-x}\text{Si}_2/\text{Si}$ Composite Electrodes for Lithium-ion Batteries

Yuta Kimura,^{a, b, c} Yasuhiro Domi,^{a, b} Hiroyuki Usui,^{a, b} and Hiroki Sakaguchi^{ , a, b}*

^a Department of Chemistry and Biotechnology, Graduate School of Engineering,
Tottori University, Minami 4-101, Koyama-cho, Tottori, 680-8552, Japan

^b Center for Research on Green Sustainable Chemistry, Tottori University,
Minami 4-101, Koyama-cho, Tottori, 680-8552, Japan

^c Daido Steel Co., Ltd.
2-30, Daido-cho, Minami-ku, Nagoya, Aichi, 457-8545, Japan

*Corresponding author: Hiroki Sakaguchi

Tel/Fax: +81-857-31-5265, E-mail: sakaguch@tottori-u.ac.jp

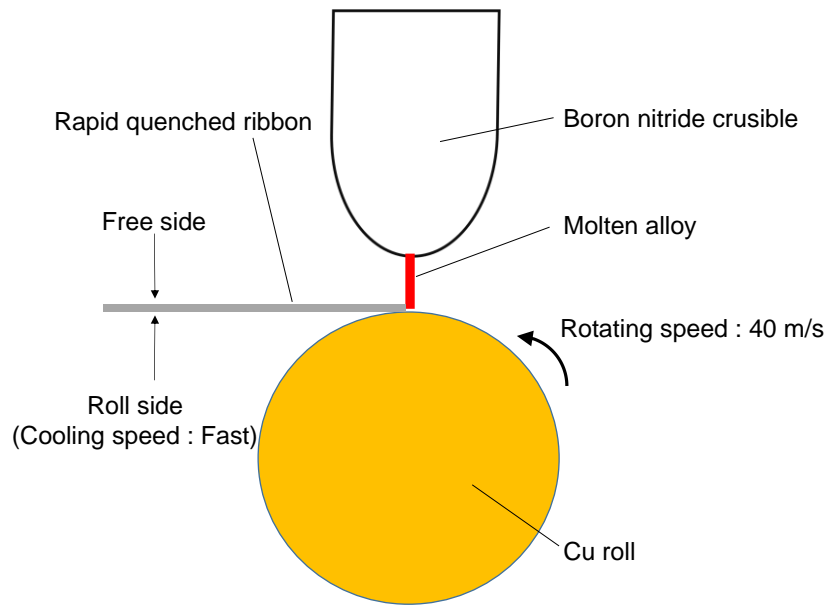


Figure S1. Schematic diagram of roll quenching method